



**PLASMA EQUIPMENT**

**Package Contents**

- Plasma Power Source (FP-25i, FP-35i or FP-45i)
- 60A Plasma Torch (connected)
- Work Cable and Clamp
- Two (2) tips and two (2) electrodes
- Electrode Wrench
- Shoulder Strap
- User Manual (Power Source and Torch)



Ordering Information/Specifications		FP-25i	FP-35i	FP-45i
<b>System Part No.</b>		1445-1925*	1445-1935*	1445-1945*
Frequency		50/60Hz		
Cutting Capacity	Mild Steel (CleanCut)	5/16" (8 mm)	1/2" (12 mm)	5/8" (16 mm)
	Mild Steel (Severance)	3/8" (10 mm)	5/8" (16 mm)	1" (25 mm)
	Stainless (Clean Cut)	1/4" (6 mm)	3/8" (10 mm)	1/2" (12 mm)
	Aluminum (Clean Cut)	3/16" (5 mm)	5/16" (8 mm)	3/8" (10 mm)
Piercing Capacity		3/16" (5 mm)	1/4" (6 mm)	3/8" (10 mm)
Output Current		20-25 Amps	20-35 Amps	20-45 Amps
Duty Cycle		25A @ 25%	35A @ 35%	45A @ 35%
Input Air Pressure		80-110 psi (5.5-7.6 bar)		
Air Flow		3.9 cfm (110 l/min)		
Torch Air Pressure		67 cfm (4.6 bar)		
Weight (machine + torch)		29.7 lbs. (13.5 kg)		
Dimensions (W x H x D)		6.9" x 12.8" x 16.3" (176 mm x 324 mm x 415 mm)		
Enclosure class		IP21C, EN 60974-1, CSA, ETL		

**Consumables/Accessories**

60A Torch Consumables	Part No.
Cutting Tip, 25A / 35A (5 pk)	1445-1901
Cutting Tip, 45A (5 pk)	1445-1902
Electrode, 60A (5 pk)	1445-1903
Stand Off Guide, 60A	1445-1904
Shield Cup, 60A	1445-1905
O-Ring, 60A (3 pk)	1445-1906
Gas Diffuser, 60A	1445-1907
<b>Accessories</b>	
Plasma Torch, 60A, with 25A/35A and 45A Tips	1445-1900
Inline Air Filter	1445-1908
Inline Air Filter Cartridge	1445-1909
Circle Cutting Guide	1445-1910

\* (includes 60A torch, two (2) tips, two (2) electrodes, electrode wrench, and User Manual)

Customer Service: 800-858-4232  
 Technical Service: 800-426-1888  
 Fax: 800-535-0557  
 Email: VSP@VictorTechnologies.com  
 FirepowerOnline.com

Form No. 83-1906 (02/26/20)

© 2019 The ESAB Group, Inc. Printed in U.S.A.



**FP Series Manual Plasma Cutting Systems**



[FirepowerOnline.com](http://FirepowerOnline.com)





Firepower® has launched a new series of manual plasma machines—the FP-25i, FP-35i, and FP-45i—featuring an advanced LCD interface that simplifies set-up and operation. Operators make all adjustments with just one knob, viewing process information on the generous, full-color 2.8-in. screen.

In addition to their rated cut thickness—that indicates a quality cut at good speed—they'll also sever thicker material. The FP-45i can carve through 1-in. steel, but even the FP-25i can cut through 3/8-in. steel. The FP units deliver a lot of punch to meet most any cutting need.

### Manual Plasma Cutting Made Easy

FP Series plasma cutting systems are powerful enough to handle tough cutting jobs without dealing with complicated set-up and operation. Cut through grates and plates in mild steel, stainless steel or aluminum with ease. Available in three versions to meet your required thickness level:

#### Firepower 25i

--	--	--	--	--	--	--


#### Firepower 35i

--	--	--	--	--	--	--

#### Firepower 45i

--	--	--	--	--	--	--

2.8" LCD DISPLAY

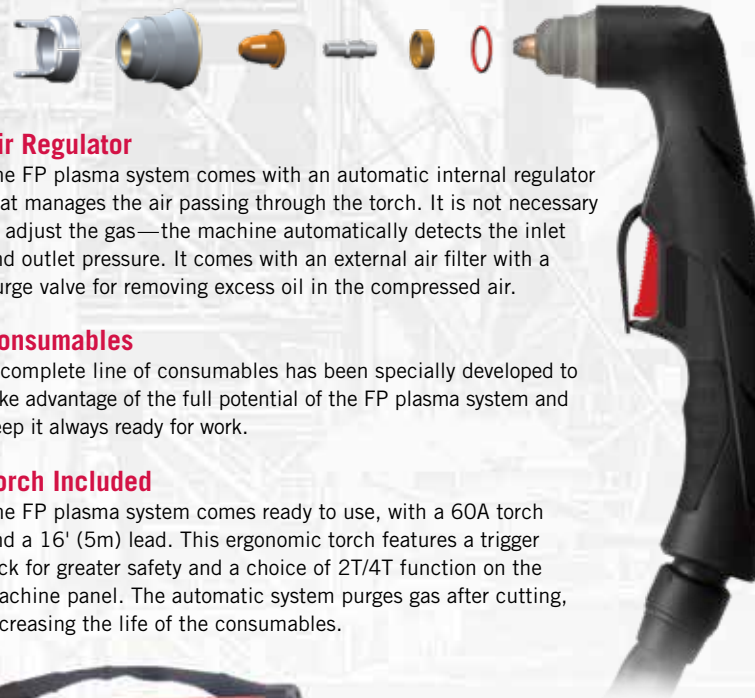

### Air Regulator

The FP plasma system comes with an automatic internal regulator that manages the air passing through the torch. It is not necessary to adjust the gas—the machine automatically detects the inlet and outlet pressure. It comes with an external air filter with a purge valve for removing excess oil in the compressed air.

### Consumables

A complete line of consumables has been specially developed to take advantage of the full potential of the FP plasma system and keep it always ready for work.

### Torch Included

The FP plasma system comes ready to use, with a 60A torch and a 16' (5m) lead. This ergonomic torch features a trigger lock for greater safety and a choice of 2T/4T function on the machine panel. The automatic system purges gas after cutting, increasing the life of the consumables.

### Intuitive LCD display

The FP plasma system is totally user-friendly with a 2.8" color LCD screen, that clearly displays all settings you need to see at a glance—cutting mode, input voltage, and input air pressure.



### All in One Knob

Complete with the functions necessary for any cutting job, FP plasma cutting machine is simple and quick to set up with just one knob:

- 1 Select the desired mode for torch control, 2T – On/Off, 4T – Lock-on
- 2 Select “grate” or “plate” depending on the material you’ll be cutting—there’s a specific setting for each!
- 3 You’re ready to start cutting!

